


Tested element: SGG Stadip Silence 44.1 (12) SGG Planilux 4 (12) SGG Planilux 4

Specimen surface  
Receiving room volume  
Source room volume

S = 1,88m<sup>2</sup>  
V = 86m<sup>3</sup>  
98m<sup>3</sup>

FREQ. Hz	R dB
100	23,8
125	20,4
160	23,6
200	23,0
250	27,6
315	29,2
400	31,6
500	35,5
630	38,8
800	43,9
1000	49,9
1250	54,7
1600	56,2
2000	55,7
2500	51,4
3150	45,3
4000	51,8
5000	56,0

**R<sub>w</sub> (C;C<sub>tr</sub>) = 38 (-1 ; -5) dB**

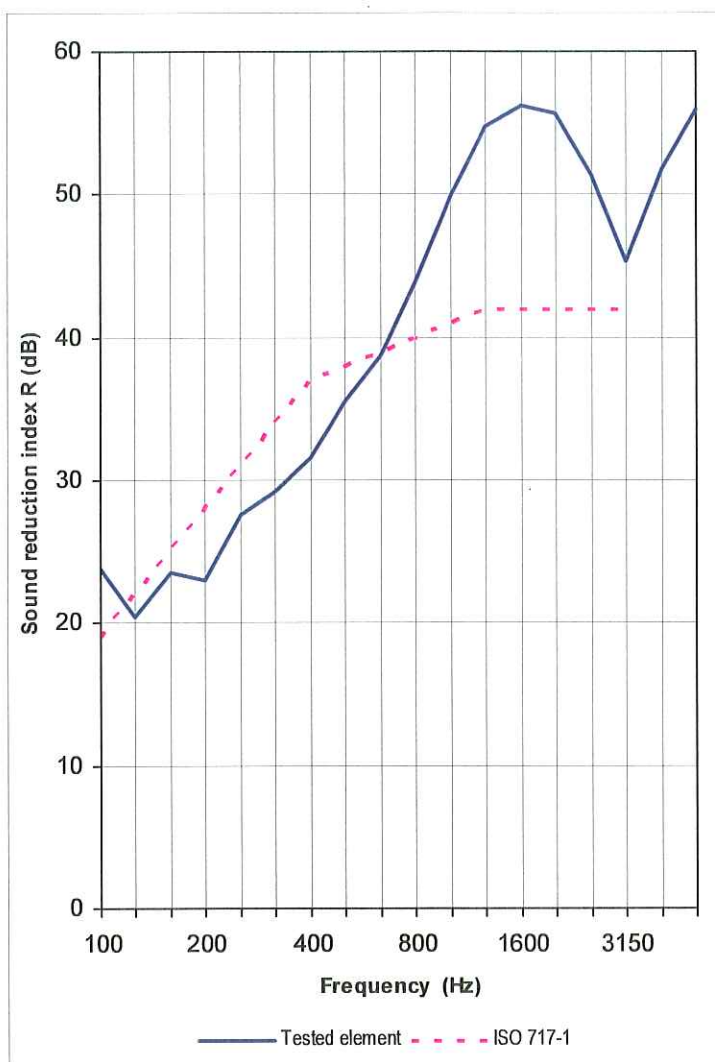

Rating according to ISO 717-1 (in the band 100 ÷ 3150 Hz) based on laboratory measurements: